

---

Addis Ababa University  
Addis Ababa Institute of Technology  
School of Civil and Environmental Engineering

---

Fundamentals of Geotechnical Engineering II (CEng2142)  
Test 1

---

Name	
ID No.	
Signature	
Section	
Exam Date:	18.04.2019

---

Instruction:

- 1) This examination is closed book and constitutes 15% of your final grade.
- 2) The time allowed for this exam is 1hour.
- 3) Please read the questions carefully and make sure you understand the facts before you begin answering. Write as legibly and concisely as possible.
- 4) Use the provided space properly to present you answer.

Question #	Weight [marks]	Score [marks]
1	10	
2	70	
3	20	

Examination paper set checked by: Henok Fikre (Dr.-Ing.)

Signature:

## QUESTION 1: On Genesis of Soils & Soil Mechanics

[10%]

1.1 Mention and briefly explain at least 5 peculiar features of soil as an engineering material. (5 marks)


1.2 Karl von Terzaghi once wrote the following statement about civil engineering.

*“The development of every aspect of civil engineering passes through three stages: the EMPIRICAL, wherein precedent is the dominant influence; the SCIENTIFIC, wherein great strides are made and overconfidence in the power of science occasionally leads to failures; and the MATURE, wherein precedent and science combine into a judgment that permits the highest expression of the engineer’s calling.”*

Write what you understand after reading the excerpt. (5 marks)

--


## QUESTION 2: On Simple Soil Properties

[70%]

2.1 An embankment, with a total fill of 20,000 m<sup>3</sup>, expected to be compacted up to a bulk density of 20kN/m<sup>3</sup> and a water content of 22% is about to be constructed. In order to carry out the construction work, three borrow quarries (with site conditions as presented in the following table) were identified based on their engineering quality. If you are in charge of the construction works which one would you choose based on economic advantage? (20 marks)

Hint: Use dry unit weight for final economic comparisons.


	Borrow site A	Borrow Site B	Borrow Site C
Simple soil properties	$\gamma_{d_{max}} = 20 \text{ kN/m}^3$ $\gamma_{d_{min}} = 16 \text{ kN/m}^3$ $D_r = 0.7$	$\gamma_{bulk} = 19 \text{ kN/m}^3$ LI=-0.5 LL=50% PL=30%	$G_s = 2.65$ $e = 0.7$
Cost of production and hauling	50ETB/m <sup>3</sup>	45 ETB/m <sup>3</sup>	55ETB/m <sup>3</sup>

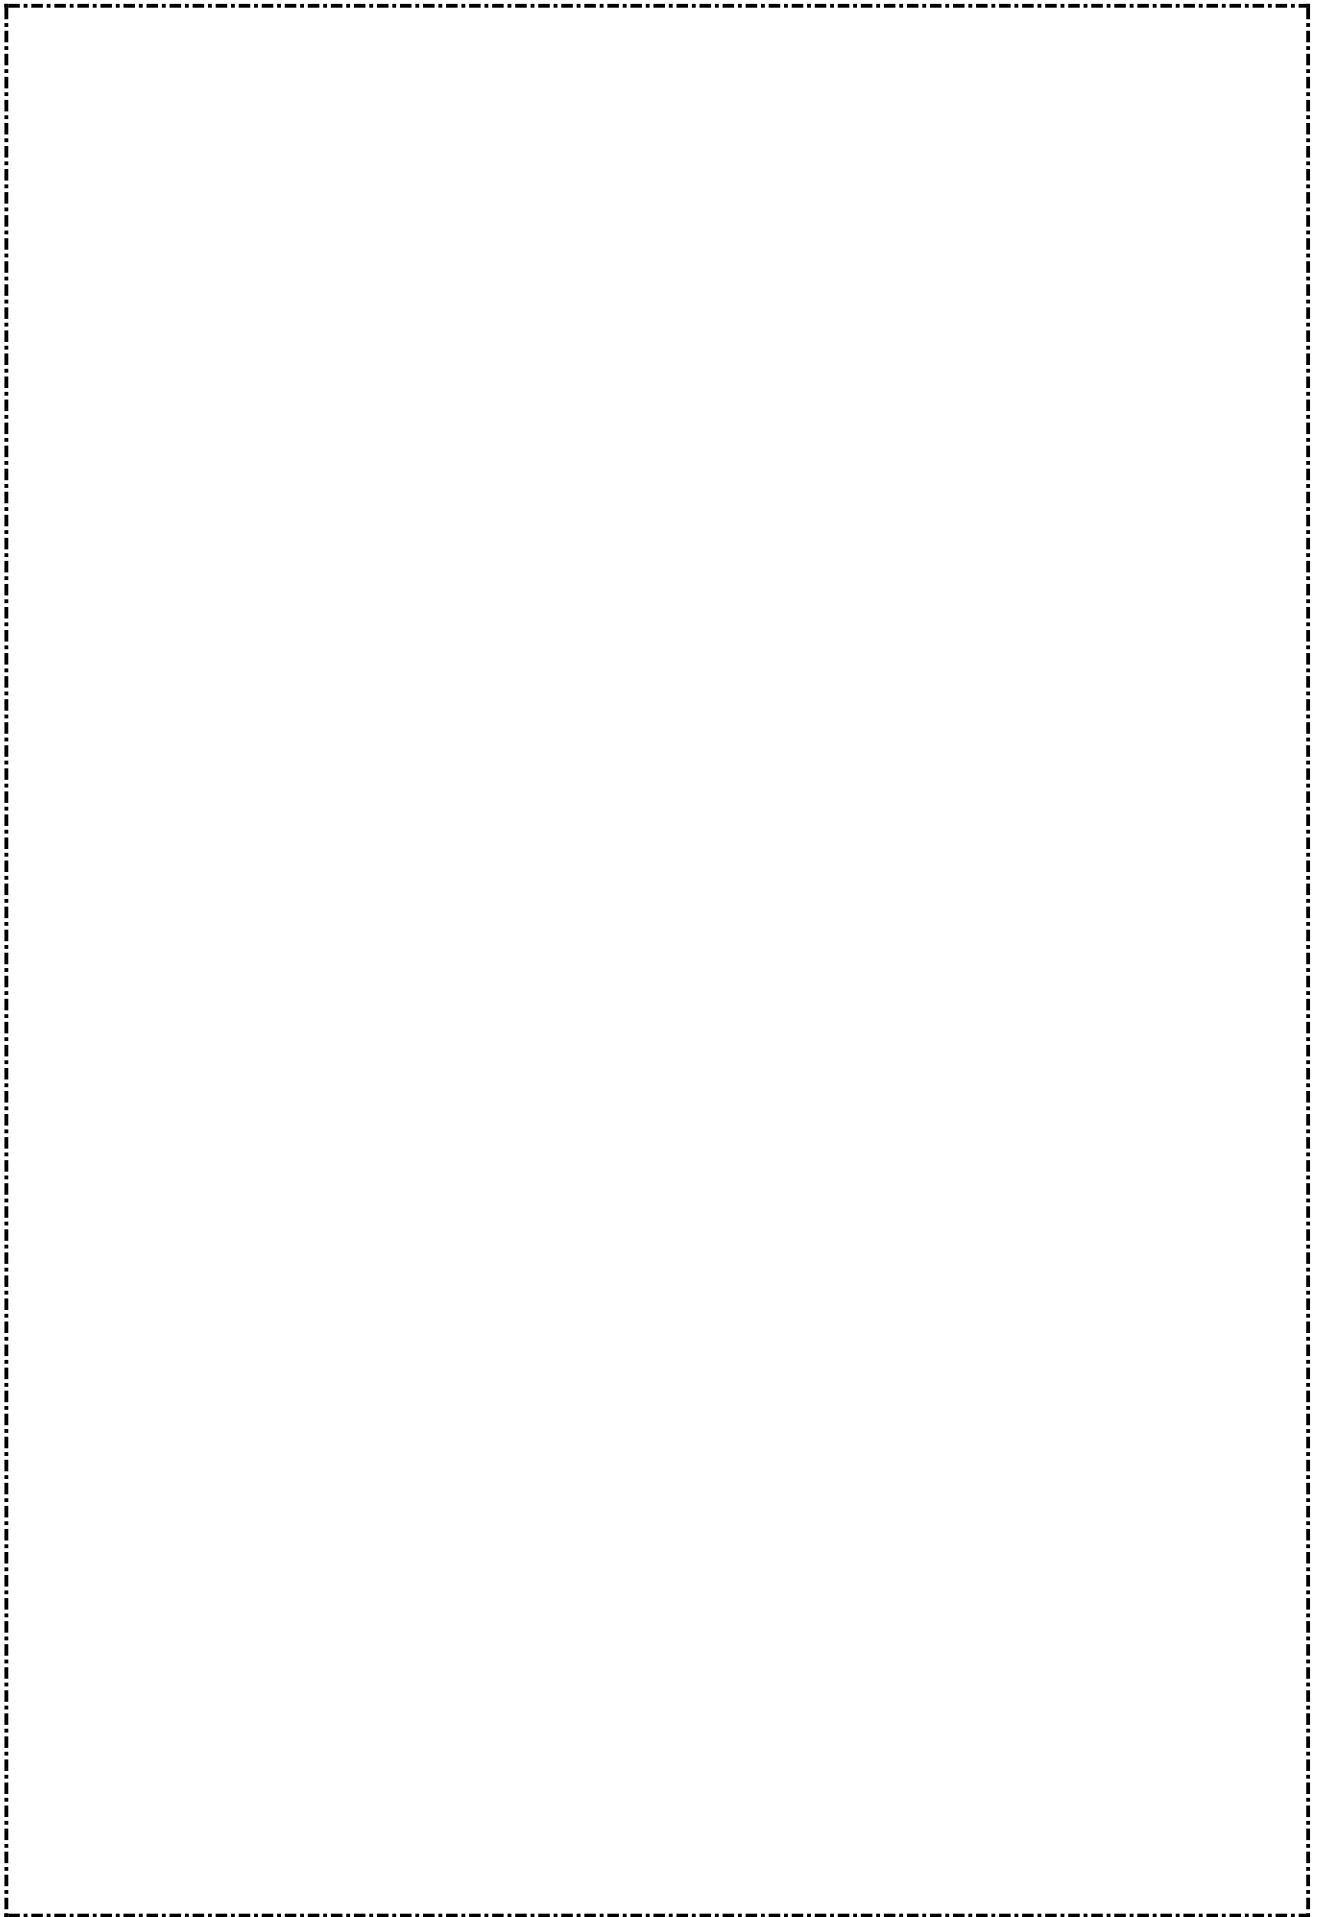

2.2 A soil sample from an **old landfill** site was taken to the laboratory for testing. The results of sieve analysis are presented as follows. (18% + 7% + 5% = 30 marks)

Sieve opening (mm.)	Weight of sieve (gm.)	Weight of sieve and soil, after shaking (gm.)			
9	244	244			
4.75	246	248			
2.36	250	266			
2	248	255			
1.18	248	255			
0.6	248	272			
0.425	249	269			
0.3	246	248			
0.15	251	301			
0.075	250	370			
PAN	300	552			

Carry out the necessary calculations and plot the grain size distribution on semi-log paper provided in the next page. Also determine uniformity coefficient and coefficient of gradation.

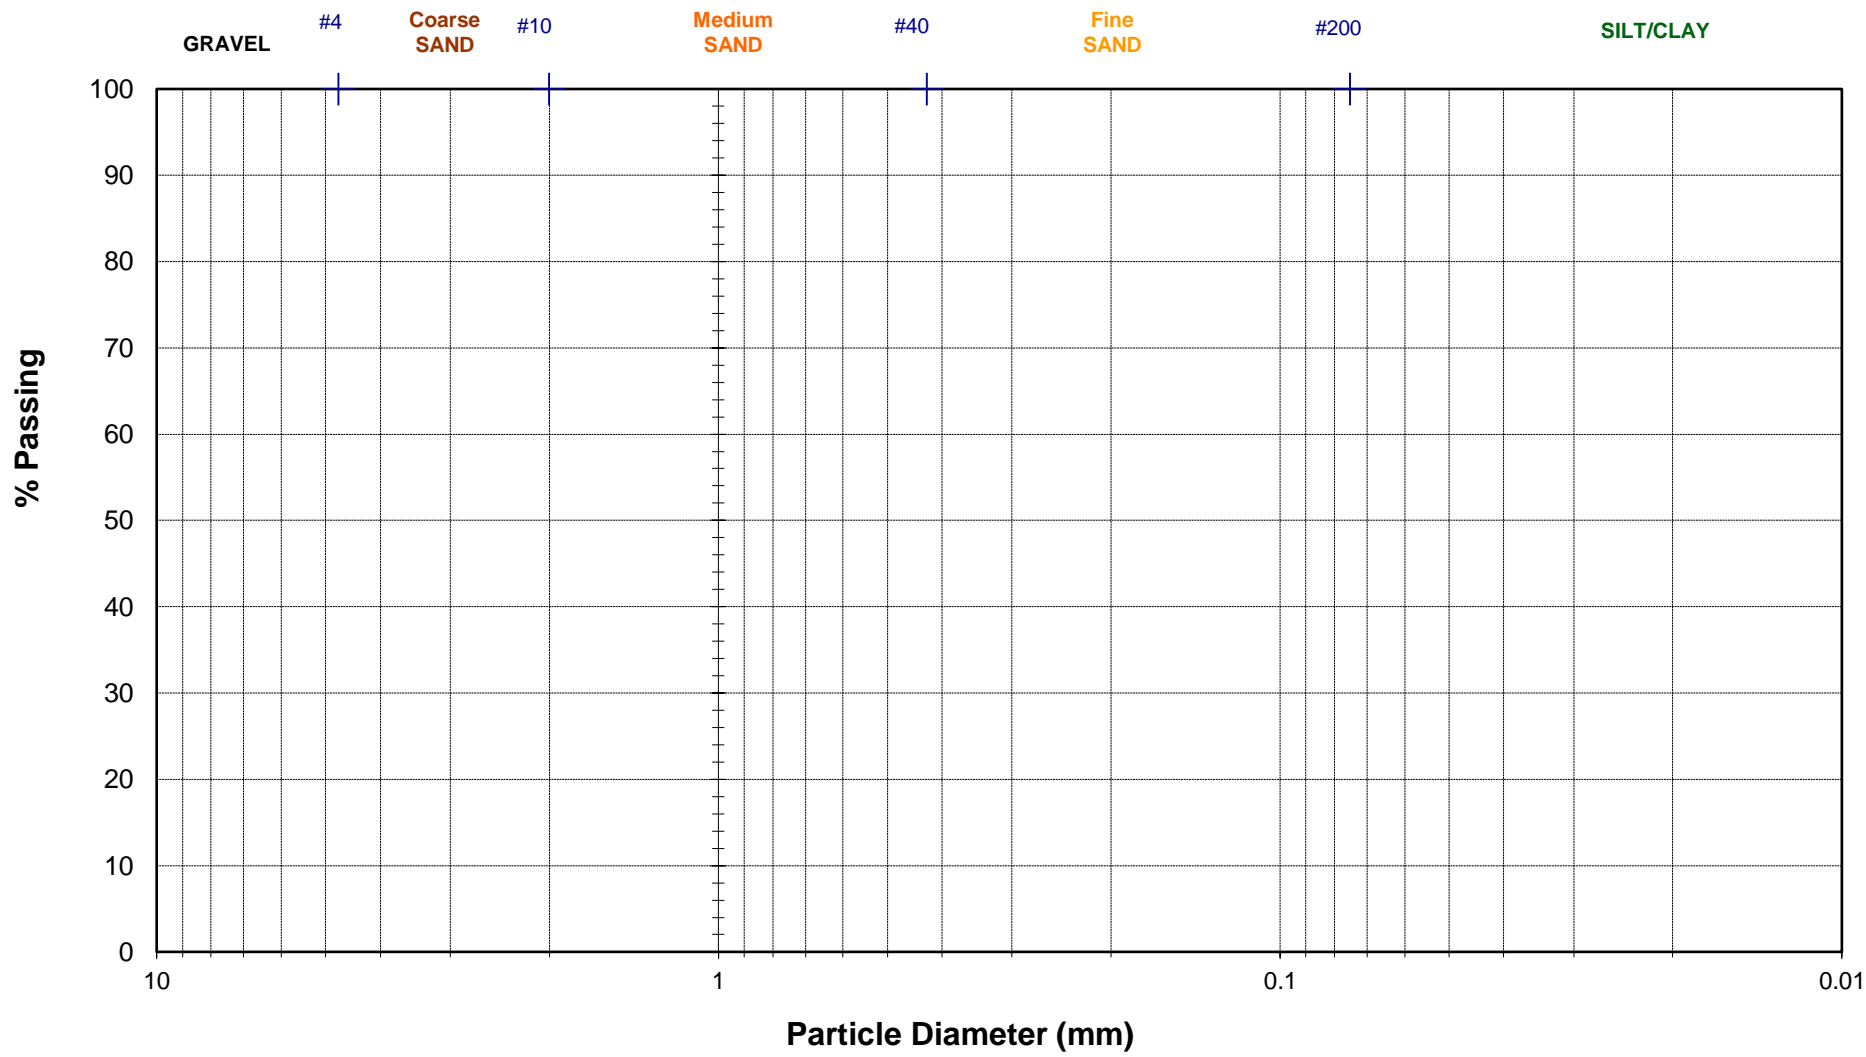

2.3 On soil consistency (3% + 3% + 2% + 2% + 10% = 20 marks)

A) What is the rationale behind fixing 3mm as the diameter of the crumbling soil in plastic limit determination? Also how does one know this diameter achieved during the experiment? (3%)

B) What is the potential problem if we use less than 6g sample of soil that crumbled at 3mm diameter in plastic limit determination? And how do you make sure to achieve such mass requirement? (3%)


D) How does one practically make sure to use saturated soil for linear shrinkage test? (2%)

E) What is the major reason mercury is used in volumetric shrinkage determination experiment? (2%)

F) The following data is part of the investigation carried out on the soil referred to in question 2.2.

Determine the liquid limit and plastic limit. (10%)

Liquid Limit			Plastic Limit	
Trial	No. of blows	Moisture Content (%)	Trial	Moisture Content (%)
1	15	75	1	28
2	22	65		
3	30	60	2	26
4	39	55		

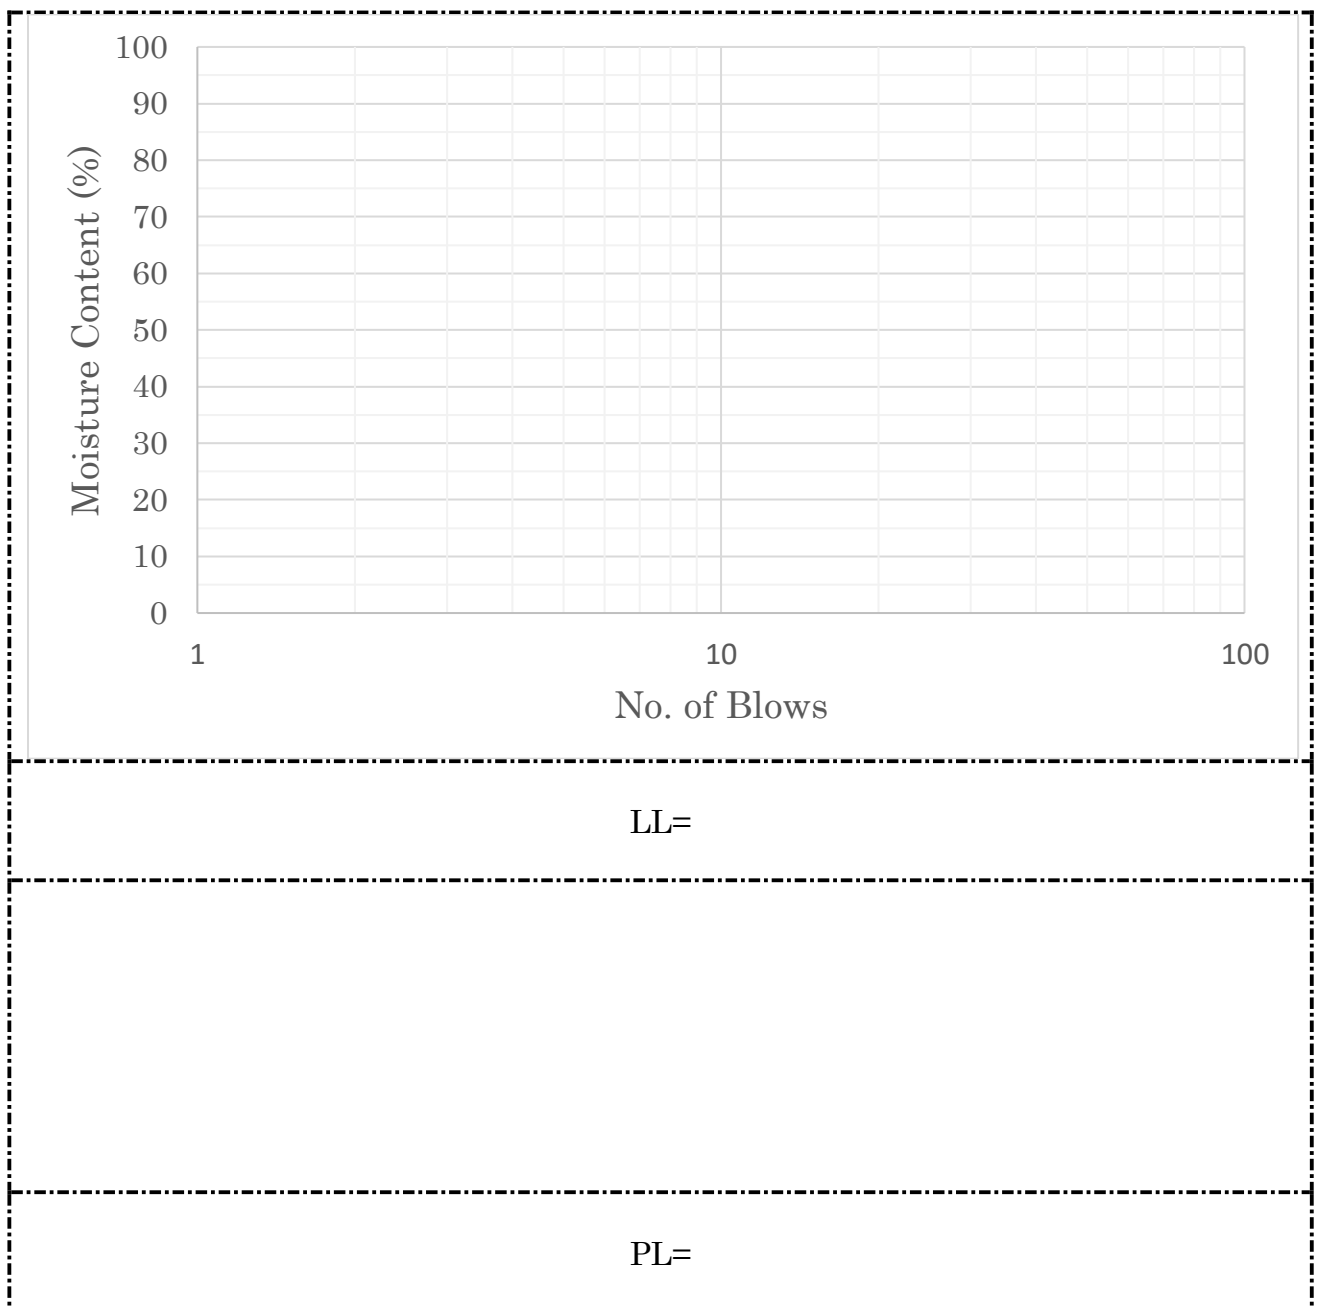



### QUESTION 3: On Soil Classification

[20%]

3.1

A) What are the two go-to parameters that a geotechnical engineer considers for classifying soils? Which of these two parameters is more relevant for

a. fine-grained soils, and

b. coarse-grained soils? Explain the why this is so. (6 marks)

Parameters	More relevant for	Reason

B) Classify the soil referred to in question 2.2 using Unified Soil Classification System. [Necessary charts are provided on last page] (14 marks)

Table 3.2 Unified Soil Classification System

Major divisions		Group symbols	Typical names	Laboratory classification criteria		
Coarse-grained soils (More than half of materials is larger than No.200 sieve size)	Gravels (More than half of coarse fraction is larger than No.4 sieve size)	Clean gravels (little or no fines)	GW	Well-graded gravels, gravel-sand mixture, little or no fines.	$C_u = \frac{D_{60}}{D_{10}}$ greater than 4, $C_c = \frac{D_{30}^2}{D_{10} \times D_{60}}$ between 1 and 3  Not meeting all gradation requirements for GW	
			GP	Poorly graded gravels, gravel-sand mixtures, little or no fines		
		Gravels with fines (Appreciable amount of fines)	GM*	d	Silty gravels, gravel-sand silt mixtures	Atterberg limits below "A" line or PI less than 4  Atterberg limits above "A" line with PI greater than 7  Above "A" line with PI between 4 and 7 are borderline cases requiring use of dual symbols
				u		
		GC	Clayey gravels, gravel-sand-clay mixtures			
	Sands (More than half of coarse fraction is smaller than No.4 sieve size)	Clean sands (little or no fines)	SW	Well-graded sands, gravelly sands, little or no fines	$C_u = \frac{D_{60}}{D_{10}}$ greater than 6; $C_c = \frac{(D_{30})^2}{D_{10} \times D_{60}}$ between 1 and 3  Not meeting all gradation requirements for SW	
			SP	Poorly graded sands, gravelly sands, little or no fines		
		Sands with fines (Appreciable amount of fines)	SM*	d	Silty sands, sand-silt mixtures	Atterberg limits below "A" line or PI less than 4  Atterberg limits above "A" line or PI greater than 7  Limits plotting in hatched zone with PI between 4 and 7 are borderline cases requiring use of dual symbols
				u		
			SC	Clayey sands, sand-clay mixtures		

Determine percentages of sand and gravel from grain-size curve. Depending on percentage of fines (fraction smaller than No. 200 sieve size), coarse-grained soils are classified as follows:  
 Less than 5 percent ..... GW/GP SW/SP  
 More than 12 percent ..... GM/GC, SM/SC  
 Borderline case requiring dual symbols \*\*

Fine-grained soils (More than half of materials is smaller than No.200 sieve)	Sils and clays (Liquid limit less than 50)	ML	Inorganic silts and very fine sands, rock flour, silts or layer fine sands, or clayey silts with slight plasticity
		CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays
		OL	Organic silts and organic silty clays of low plasticity
	Sils and clays (Liquid limit greater than 50)	MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts.
		CH	Inorganic clays of high plasticity, fat clays
		OH	Organic clays of medium to high plasticity, organic silts
	Highly organic soils	Pt	Peat and other highly organic soils

